


SolarTerrace III-A Double Support

Assembly



Component

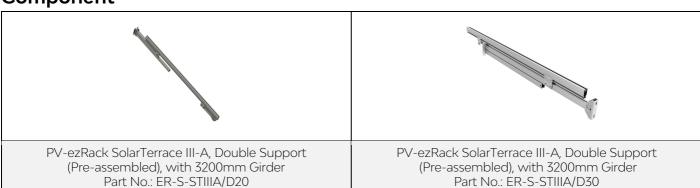

Technical Specification

rechinical Specification		
Application	Compatible with Clenergy SolarTerrace III-A	3200 575
Tilt Angle	ER-S-STIIIA/D20: 20° ER-S-STIIIA/D30: 30°	1828
Weight	ER-S-STIIIA/D20: 17.340kg ER-S-STIIIA/D30: 18.335kg	1809
Packaging	ER-S-STIIIA/D20: 36 PCS per pallet ER-S-STIIIA/D30: 24 PCS per pallet	
Material	Main Structure: AL6005-T5 Fasteners: SUS 304	
Color	Silver	
Earthing	A full earthing system from T rail to support with pre-fitted pressure bolts and star washers	5/5/
Standard	AS NZS1170.2-2011	1665





