

# ESA Series

## 3-10kW/5-48kWh | Single Phase Home Storage Solution (HV)

The GoodWe ESA Series is a fully integrated all-in-one solar and storage solution that combines inverter and battery in a pre-wired, modular design-making installation significantly faster and easier. Engineered for flexibility, the ESA system allows seamless expansion to meet evolving energy needs. 5kWh and 8kWh battery modules support 1C charging/discharging and can be mixed in a single stack up to 48kWh, with up to 6x stacks in parallel. The ESA provides UPS-level, full house back-up (63A) with no gateway needed. Models feature 2-4 MPPTs, each supporting up to 26A short-circuit input current. Safety features include 6-level battery protection and AI-driven AFCI 3.0 as standard, plus low noise levels of <35dB makes the ESA suitable for a wide variety of applications.



### Optimized Performance

- 1C charge/discharge for rapid energy cycling
- Fanless design for quiet operation, noise <30dB
- 20A per string & 200% PV oversizing



### Flexible & Adaptable Applications

- Dual output ports for simplified installation & off-grid capability
- Flexible battery mixing with different capacity or old&new batteries
- Support full backup load with 63Ax5 output



### Superb Safety & Reliability

- Advanced 6-layer safety protection
- Heating mode ensures reliable performance even in -20°C
- AI-driven AFCI 3.0 for safety<sup>1</sup>



### Smart Control & Monitoring

- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

# ESA Series / Power Module

GOODWE

Technical Data	GW3K-EHA-G20	GW3.6K-EHA-G20	GW5K-EHA-G20	GW6K-EHA-G20	GW8K-EHA-G20	GW9.999KEHA-G20
<b>Battery Side</b>						
<b>Battery Type</b>						
Battery Type	LFP(LiFePO <sub>4</sub> )					
Nominal Battery Voltage (V)	380					
Battery Voltage Range (V)	350 ~ 550					
Start-up Voltage (V) <sup>1</sup>	380					
Number of Battery Input	1					
Max. Continuous Charging Current (A)	11.9	14.3	19.8	23.7	31.6	35.6
Max. Continuous Discharging Current (A)	8.7	10.5	14.5	17.4	23.2	29.0
Max. Charging Power (kW)	4.5	5.4	7.5	9.0	12.0	13.5
Max. Discharging Power (kW)	3.3	3.96	5.5	6.6	8.8	11.0
<b>PV Side</b>						
Max. Input Power (kW)	6.0	7.2	10.0	12.0	16.0	20.0
Max. Input Voltage (V) <sup>2</sup>	600					
MPPT Operating Voltage Range (V) <sup>3</sup>	40 ~ 560					
Start-up Voltage (V)	50					
Nominal Input Voltage (V)	400					
Max. MPPT Current (A)	20					
Max. MPPT Short Circuit Current (A)	26					
Number of MPPTs	2	2	2	2	4	4
Number of Strings per MPPT	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1 / 1 / 1	1 / 1 / 1 / 1
<b>AC Side (On-grid)</b>						
Nominal Power (kW)	3.0	3.6	5.0	6.0	8.0	9.999
Nominal Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999
Max. Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999
Max. Apparent Power from Grid (kVA)	6.0	7.2	10.0	12.0	14.5	14.5
Nominal Voltage (V)	220 / 230 / 240, L / N / PE					
Voltage Range (V)	170 ~ 280					
Nominal Frequency (Hz)	50 / 60					
Frequency Range (Hz)	45 ~ 55 / 55 ~ 65					
Max. Current to Grid (A)	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V
Max. Current From Grid (A)	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	32.8 @ 220V 31.4 @ 230V 30.0 @ 240V	45.5 @ 220V 43.5 @ 230V 41.7 @ 240V	50.0 @ 220V 50.0 @ 230V 50.0 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V
Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)					
THDi	<3%					
<b>Back-up Side</b>						
Nominal Output Apparent Power (kVA)	3.0	3.6	5.0	6.0	8.0	10.0
Max. Output Apparent Power(kVA)	3.0 (6.0, 10s)	3.6 (7.2, 10s)	5.0 (10.0, 10s)	6.0 (12.0, 10s)	8.0 (16.0, 10s)	10.0 (20.0, 10s)
Max. Output Apparent Power (Bypass) (kVA)	6.0	7.2	10.0	12.0	14.5	14.5
Max. Output Current (A)	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V
Max. Output Current (Bypass) (A)	27.3	32.8	45.5	50.0	63.0	63.0
Nominal Output Voltage (V)	220 / 230 / 240, L / N / PE					
Nominal Output Frequency (Hz)	50 / 60					
THDv (@Linear Load)	<3%					
<b>Efficiency</b>						
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.5%	97.5%
European Efficiency	96.5%	96.5%	96.8%	97.0%	96.8%	96.8%
Max. Battery to AC Efficiency	98.0%	98.0%	98.0%	98.0%	97.8%	97.8%
<b>Protection</b>						
PV String Current Monitoring	Integrated					
PV Insulation Resistance Detection	Integrated					
Residual Current Monitoring	Integrated					
PV Reverse Polarity Protection	Integrated					
Battery Reverse Polarity Protection	Integrated					
Anti-islanding Protection	Integrated					
AC Overcurrent Protection	Integrated					
AC Short Circuit Protection	Integrated					
AC Overvoltage Protection	Integrated					
DC Surge Protection	Type II					
AC Surge Protection	Type II					
RSD	Optional					
AFCI	Integrated					
Remote Shutdown	Integrated					
<b>General Data</b>						
Operating Temperature Range (°C)	-35 ~ +60 (Derating at +40)					
Relative Humidity	0 ~ 95%					
Max. Operating Altitude (m)	4000 (>2000 derating)					
Cooling Method	Natural convection					
User Interface	LED, WLAN + APP					
Communication with BMS	CAN					
Communication	RS485, WiFi + LAN + Bluetooth					
Communication Protocols	Modbus-RTU, Modbus-TCP					
Weight (kg)	24	24	24	24	26	26
Dimension (W x H x D mm)	800 x 300 x 270					
Noise Emission	≤30	≤30	≤30	≤30	≤35	≤35
Topology	Non-isolated					
Ingress Protection Rating	IP66					
Mounting Method	Wall / Floor Mounted					
Country of Manufacture	China					

\*1: If there's no PV, start-up voltage will be 380V.

\*2: When the input voltage is 560V-600V, the inverter will enter standby mode, and the voltage returns to 560V to enter the normal operation state.

\*3: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.

\*4: Please visit GoodWe website for the latest certificates.

# ESA Series / Battery Module

GOODWE


Technical Data	GW5.1-BAT-D-G20	GW8.3-BAT-D-G20	GW5.1-BAT-D-G21	GW8.3-BAT-D-G21
Rated Energy (kWh)	5.12	8.32	5.12	8.32
Usable Energy (kWh)	5 <sup>*1</sup>	8 <sup>*2</sup>	5 <sup>*1</sup>	8 <sup>*2</sup>
Battery Type		LFP (LiFePO <sub>4</sub> )		
Nominal System Voltage (V)		Charge: 420V; Discharge: 380V		
Operating Voltage Range (V) (single phase system)		350 ~ 550		
Operating Voltage Range (V) (three phase system)		700 ~ 950		
Max. Input Current (System) (A)	12	19	12	19
Max. Output Current (System) (A)	13.2	21.0	13.2	21.0
Max. Input Power (System) (kW) <sup>*3</sup>	5	8	5	8
Max. Output Power (System) (kW) <sup>*3</sup>	5	8	5	8
Peak Output Power (System) (kW) <sup>*3</sup>	7.5 @ 10s	12 @ 10s	7.5 @ 10s	12 @ 10s
Charging Temperature Range (°C)	-18 ~ +55	-18 ~ +55	+2 ~ +55	+2 ~ +55
Discharging Temperature Range (°C)		-20 ~ +55		
Relative Humidity		5 - 95%		
Max. Operating Altitude (m)		4000		
Noise Emission (dB)		≤29		
Communication		CAN		
Weight (kg)	57.5 ± 1	79.0 ± 1	57.5 ± 1	79.0 ± 1
Dimensions (W x H x D mm)		800 x 326 x 270		
Optional Function Configuration	Heating	Heating	-	-
Ingress Protection		IP66		
Max. Storage time		12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)		
Scalability		6 pcs		
Mounting Method		Floor stacked / Wall-mounted		
Country of Manufacture		China		
Standard and Certification	Safety	IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC		
	EMC	CE, RCM		
	Transportation	UN38.3, ADR		

\*1: Test conditions, 98% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

\*2: Test conditions, 96% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

\*3: Max. Input Power / Max. Output Power / Peak.Output Power derating will occur related to Temperature and SOC.

\*: Please visit GoodWe website for the latest certificates.

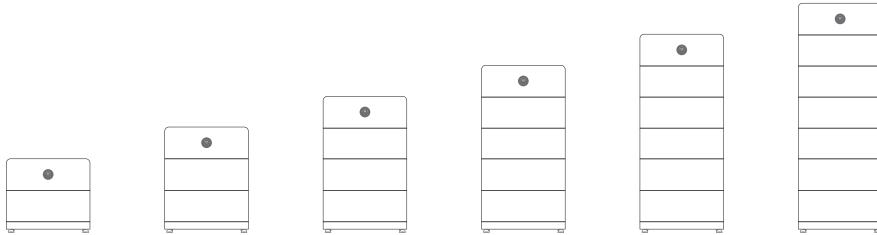

Number of Battery Modules (pcs)	1	2	3	4	5	6
Total Energy Capacity (kWh)	5.12	10.24	15.36	20.48	25.60	30.72
Total Energy Capacity (kWh)	8.32	16.64	24.96	33.28	41.60	49.92